


AWS Ceramic Diplexer



2DPX-1747.5/2140-X62Q

This ceramic diplexer is perfect for applications where low cost and high performance are at a premium.

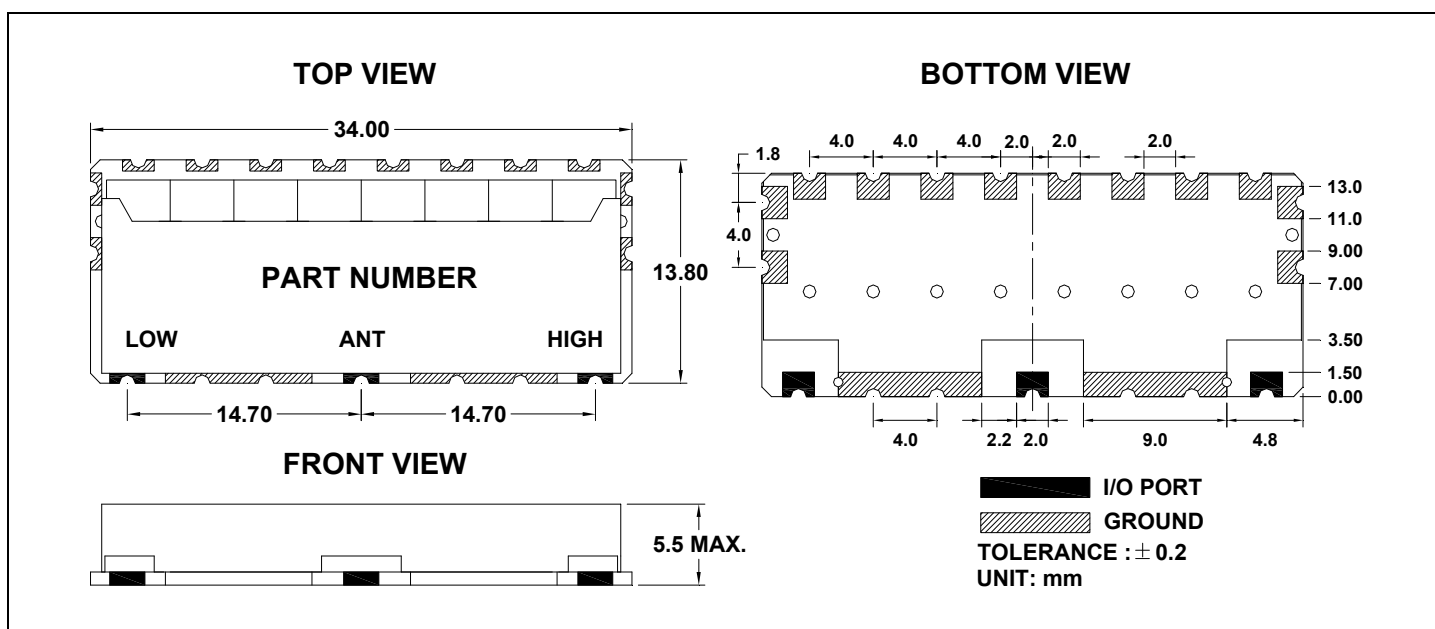

Electrical Specifications

Center Frequencies	1747.5 & 2140 MHz
Passbands	CF ± 31.5 MHz, minimum
Insertion Loss	≤ 1.6 dB @ Passbands
Return Loss	≥ 15 dB @ Passband
Attenuation	≥ 35 dBc @ 2109 – 2171 MHz
Attenuation	≥ 35 dBc @ 1716.5 – 1778.5 MHz
Operating Temperature	0° to +60° C
Connectors	Solder Pads in / out
Size	0.22" high x 0.55" wide x 1.35" long, nominal

Reactel, Incorporated - Reacting First to Your Filter Requirements

8031 Cessna Avenue • Gaithersburg, Maryland 20879

Phone: 301-519-3660 • Fax: 301-519-2447 • reactel@reactel.com • www.reactel.com